

Motic®

MORE THAN MICROSCOPY

MOTICAMS1

USB CAMERAS

The new Motic sCMOS cameras developed by German engineering represent a new impetus to manufacturing quality, technical precision and lightweight design. With a member of this line the door for new application fields opens wide. The accelerated data readout (Rolling Shutter) also enables to work on fast moving phenomena.

The Moticam S1 as entry model with the new back-illuminated sensor and speedy data transfer (excellent framerate up to 120 fps) makes any picture capturing easy. Convert your images in reproducible files: share or print like a professional.



www.moticamseries.com | www.moticeurope.com

SCIENTIFIC CMOS CAMERA





MOTICAMS1 TECHNICAL SPECIFICATIONS

Sensor type	sCMOS
Sensor size	1/3"
Imaging area	6.09mm (Diagonal)
Capture resolution	1.2MP
Live display mode through USB	1280x960, 640x480 pixels
Pixel size	3.75x3.75µm
Scan mode	Progressive
Shutter mode	Rolling Shutter
Data transfer	USB 3.1
Max. frames per second (fps*)	1280x960 @ 120fps 640x480 @ 240fps
Exposure time	15 µsec to 2 sec
Operating temperature	From -10 to +60 Degrees Celsius non condensing
Sensitivity	2350mV(G) @ 1/30 sec
Support device	TWAIN, SDK and DirectShow Driver
Supported OS	Microsoft Windows 7/8/10, MAC OSX10.9, Linux or higher
Minimum computer requirements	2GHz dualcore - RAM memory 2GB - Video memory min. 512 MB
Lens mount	C-Mount
Software	Motic Images Plus 3.0 for Windows, OSX and Linux
Functions	Still image and video capture, live and still image measurement, image adjustments, white balance, automatic & manual exposure, individual objective calibration system.
Power supply	5V (from USB Port)
Package includes	CS ring adaptor, USB 3.1 cable, Motic 4-dot calibration slide, Motic Images Plus 3.0 for PC/OSX/Linux


**Frames per second under optimal lighting conditions and in compliance with computer technical requirements.*

MOTIC IMAGES PLUS 3.0 IMAGE ANALYSIS SOFTWARE

Grab your image with highest sensor sensitivity. Navigate in the dark!

Motic Images Plus 3.0

By connecting your Moticam to your computer you will be able to work with our well-known software that comes included in the package. View, capture, edit, measure, make reports... all its standard features and the new ones packed in a new user-friendly interface.

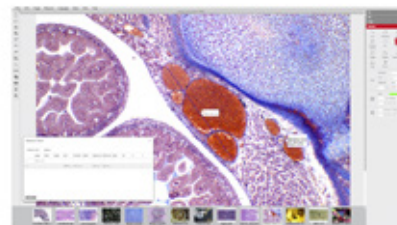

FAST FRAME RATES



sCMOS SENSOR



USB 3.1 INTERFACE



MIP 3.0 SOFTWARE